

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 043 816 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
11.10.2000 Bulletin 2000/41

(51) Int Cl.7: **H01S 3/067**

(21) Application number: **00302938.6**

(22) Date of filing: **07.04.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Prohaska, John D.  
Millbury, Massachusetts, 01527 (US)
- Smith, Malcom  
Charlton, Massachusetts, 01507 (US)
- Tankala, Kanishka  
Sturbridge, Massachusetts, 01550 (US)

(30) Priority: **09.04.1999 US 128487 P**  
**31.03.2000 US**

(71) Applicant: **LUCENT TECHNOLOGIES INC.**  
**Murray Hill, New Jersey 07974-0636 (US)**

(74) Representative:  
**Watts, Christopher Malcolm Kelway, Dr.**  
**Lucent Technologies (UK) Ltd,**  
**5 Mornington Road**  
**Woodford Green Essex, IG8 0TU (GB)**

(72) Inventors:  
• **Mazzarese, David J.**  
**Warren, Massachusetts 01803 (US)**

**(54) Cladding member for optical fibers and optical fibers formed with the cladding member**

(57) The present invention provides an optical fiber for use in fiber lasers and amplifiers wherein the optical fiber has a core member surrounded by a cladding member for receiving pump energy and transferring the pump energy to the core member. The optical fiber also has an outer layer surrounding the cladding member. The cladding member has a circular exterior periphery and a predetermined refractive index ( $n_c$ ). The cladding member has an index modified region that directs light

to the core member. The index modified region has a stress field portion with a predetermined refractive index ( $n_s$ ). The difference between the refractive index of the cladding member and that of the stress field portion ( $n_c - n_s$ ) is within such a range that the stress field portion does not affect the polarization properties of the light traveling in the core. Preferably, the difference between the refractive index of the cladding member and that of the stress field portion ( $n_c - n_s$ ) is less than  $10^{-4}$ , and more preferably  $10^{-5}$ .

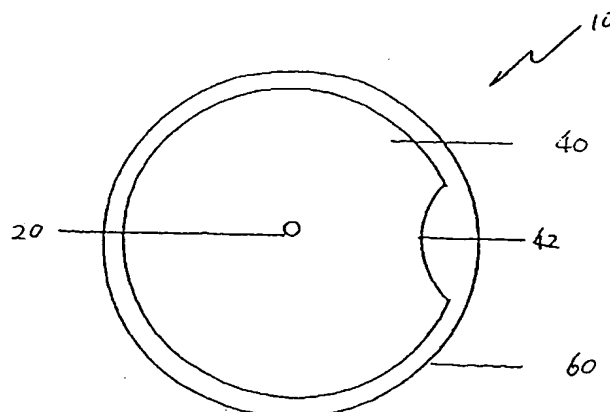


Fig. 3(a)

**EP 1 043 816 A2**

**BEST AVAILABLE COPY**

## Description

### Field Of The Invention

[0001] The present invention relates to a cladding member and, more particularly, a cladding member for double-clad fiber lasers and amplifiers. In addition, the present invention relates to an optical fiber formed with such a cladding member.

### Background Of The Invention

[0002] Fiber lasers and amplifiers can be made from optical fibers whose cores are doped with rare-earth materials. Optical fibers are pumped with light of a suitable wavelength to achieve laser action or signal amplification. The laser transition wavelength depends on a selection of rare-earth materials and host composition. Various rare-earth ions including Nd, Er, Yb, Ho, Tm, Pr, Eu, Ce, Dy, Sm, Tb, Gd and Pm have been used, which can provide laser action.

[0003] Based on the pumping technique, fiber lasers are classified into core- pumped fiber lasers and clad-pumped fiber lasers. In a core-pumped fiber laser, light from a pump source, such as a diode laser, is coupled directly into the fiber core which is doped with rare-earth materials. In a clad-pumped fiber laser, the single mode core doped with rare-earth materials is surrounded by an undoped multimode cladding. The pump light is launched into the cladding and guided in the cladding by a second cladding (glass or a polymer) with a lower refractive index. Cladding-pumped fiber lasers are therefore also referred to as double-clad fiber lasers. The main advantage of clad pumping over core pumping is that clad- pumped fibers are readily scalable to high output powers.

[0004] Figure 1 shows a conventional double-clad fiber in which the core 2 and the first cladding 4 are both circular and are concentric with each other. Such a circular cladding 4 can support many modes which spiral around the core 2 without asserting any intensity on the core 2. Moreover, light launched into a circular cladding 4 will not be absorbed fully by the core 2. Thus, the circular-type double cladding 4 precludes efficient coupling of the pump light from the cladding to the core 2.

[0005] Other cladding members 4 are used to facilitate pump light rays to cross to the core 2 as they travel along the length of the fiber. Figure 2(a) shows a double-clad fiber that has an off-centered core 2 as disclosed in U.S. Patent No. 4,815,079. By off centering the core 2, skew mode light, which does not intersect the core 2 in a concentric geometry, can be made to intersect the core 2. However, an off-center-type cladding member 4 is still inefficient and impractical because a fraction of the skew mode light fails to intersect the core 2. Moreover, an off center type cladding member 4 is not amenable for use with standard fibers because it is difficult to align and line the off centered core 2 with the standard

core. Any misalignment of the cores can lead to significant loss of power.

[0006] Figure 2(b) shows another conventional double clad fiber in which a core 2 is centered in an elliptical cladding 4. This elliptical-type cladding 4 would be most efficient if the core 2 is positioned at one of the ellipse foci. However, such a cladding 4 is difficult to make, especially when the core 2 is to be positioned at an ellipse focus. Moreover, this elliptical type cladding 4 is not compatible with standard circular fibers, to which it has to be spliced.

[0007] Figure 2(c) shows a polygon-type cladding 4 as disclosed in U.S. Patent No. 5,533,163 wherein the polygons are categorized as "convex polygons" having the property that, if a plurality of such polygons are used to tile a plane surface, all of them will fit into the tiling with no spacing left between adjacent polygons. Further, all the polygons will be mirror images of one another about any common side. Accordingly, the above property limits the polygons to three (3), four (4) and six (6) sided polygons. These polygonal shapes significantly differ, in cross-section, from those of circular type fibers, which are commonly used to deliver pump power to double clad fibers. Therefore, polygon type cladding 4 results in a large mismatch area with a circular fiber causing inefficient coupling of pump light into double clad fibers.

[0008] Figure 2(d) shows a double clad fiber with a D-shaped cladding 4 as disclosed in U.S. Patent No. 5,864,645. Comparing to that of the polygon type cladding 4, a D-shaped cladding 4 has a smaller portion of cladding 4 that is removed. Therefore, a D-shape cladding 4 has a substantially circular shape that can effectively facilitate the double clad fiber to splice with a circular pump delivery fiber. However, as a general principle, a larger amount of cladding 4 is to be removed from the cladding 4 to improve the coupling efficiency. To solve the above dilemma, a much longer fiber is needed to couple the required pump light from the cladding 4 to the core 2 without losing the advantage of a substantially circular cladding 4. Such an extra coupling length is inefficient.

[0009] Therefore, it is desired to obtain a novel cladding member that facilitates both efficient coupling and effective splicing. Further, it is desired that such a novel cladding member as well as the optical fiber formed with the novel cladding member are easy to manufacture. The present invention provides a cladding member and an optical fiber that meet all the above requirements.

### Summary Of The Invention

[0010] The present invention provides an optical fiber for use in fiber lasers and amplifiers wherein the optical fiber has a core member surrounded by a cladding member for receiving pump energy and transferring the pump energy to the core member. The optical fiber also has an outer layer surrounding the cladding member.

The cladding member has a circular exterior periphery and a predetermined refractive index ( $n_c$ ). The cladding member has an index modified region that directs light to the core member. The index modified region has a stress field portion with a predetermined refractive index ( $n_s$ ). The difference between the refractive index of the cladding member and that of the stress field portion ( $n_c - n_s$ ) is within such a range that the stress field portion does not affect the polarization properties of the light traveling in the core member 20. Preferably, the difference between the refractive index of the cladding member and that of the stress field portion ( $n_c - n_s$ ) is less than  $10^{-4}$ , and more preferably  $10^{-5}$ .

[0011] In a preferred embodiment, the modified index region contains one or more dopants of any combination of elements Ge, Al, P, B and F. More preferably, the modified index region contains one of the following: (1) Ge and Al; (2) Ge and P; (3) Ge and B; (4) Ge and F; (5) P and Al; (6) Ge, P and Al; (7) Ge, P and B; (8) Ge, P and F; and (9) free air space.

[0012] The present invention also relates to a clad article used in optical fibers for receiving pump energy and transferring the pump energy to a core member. The clad article has a core member. A cladding member surrounds the core member and has a polygon shape of at least eight sides. Preferably, the clad article has a polygon shape of eleven sides or more. It is preferred that the clad article has a polygon shape of twelve sides or less.

[0013] The present invention further relates to a clad article used in optical fibers for receiving pump energy and transferring the pump energy to a core member. The clad article has a core member. A first cladding member surrounds the core member and has a substantially circular exterior periphery. The first cladding member has a cut-out portion extending from the exterior periphery and terminating with a curved boundary in the first cladding member. The clad article also has a second cladding member surrounding the first cladding member. The second cladding member has an interior periphery complementary to the exterior periphery of the first cladding member. In a preferred embodiment, the curved boundary of the cut-out portion is concave in relation to the circular exterior periphery. The first cladding member has three cut-out portions evenly distributed along its circular exterior periphery.

#### **Brief Description Of The Drawings**

[0014] These and other objects, features and elements of the present invention will be better understood from the following detailed description of preferred embodiments of the invention in which:

[0015] Figure 1 shows a conventional double clad fiber having circular and concentric core and clads.

[0016] Figure 2(a) shows a conventional double clad fiber with an off centered core structure.

[0017] Figure 2(b) shows a conventional double clad

fiber with its core centered in an elliptical cladding member.

[0018] Figure 2(c) shows a conventional polygon type fiber.

[0019] Figure 2(d) shows a conventional double clad fiber with a D-shaped cladding member.

[0020] Figures 3(a) and 3(b) show double clad fibers with curved cut-off portions in cladding members according to the first embodiment of the present invention.

[0021] Figures 4(a) and 4(b) show double clad fibers with polygonal cladding members according to the second embodiment of the present invention.

[0022] Figures 5(a) through 5(e) show double clad fibers with various index modified regions disposed in cladding members according to the third embodiment of the present invention.

#### **Detailed Description Of The Invention**

[0023] Various cladding members and optical fibers embodying the principles of the present invention are illustrated in Figures 1 to 5. The cladding member of the present invention allows efficient coupling of energy from the cladding member to the core member and effective splicing of fibers. In each embodiment, the same elements are designated with the same reference numerals and repetitive descriptions are omitted.

[0024] Figures 3(a) and 3(b) show a first embodiment of a double clad fiber 10 of the present invention. The double clad fiber 10 comprises a core member 20 at the center of the fiber 10. A first cladding member 40 surrounds the core member 20. The first cladding member 40 has a substantially circular exterior periphery and has one or more cut-out portions 42 formed thereon. A second cladding member 60 surrounds the first cladding member 40. Pump light in the first cladding member 40 couples with the core member 20.

[0025] In a preferred embodiment, the first cladding member 40 preferably has substantially circular exterior periphery to benefit splicing. The cut-out portion 42 is located near the outside edge of the first cladding member 40. Preferably, the cut-out portion 42 extends from the exterior periphery of the cladding member 40 toward the core member 20. More preferably, the cladding member 40 retains a substantially circular exterior periphery after the cut-out portion 42 is formed. Thereby, the substantially circular cladding member 40 is beneficial for splicing.

[0026] In a further preferred embodiment, the cut-out portion 42 is a concave portion, as shown in Figure 3 (a). The concave portion 42 extends from the exterior periphery of the first cladding member 40 and terminates with a curved boundary in the first cladding member 40. More preferably, the second cladding member 60 has an interior periphery complementary to the exterior periphery of the first cladding member 40. The concave portion 42 on the cladding member 40 can ensure that reflected light rays become highly randomized

so that they can intersect the core member 20. In addition, the concave portion 42 can maintain the maximum circular periphery of the cladding member 40 while removing the maximum amount off the cladding member 40. Therefore, the cladding member 40 retains a substantially round shape to facilitate splicing to a round pump delivery fiber and, at the same time, has a sufficient amount removed therefrom to improve coupling efficiency.

**[0027]** In another preferred embodiment as shown in Figure 3(b), the first cladding member 40 has three concave portions 42. These three concave portions 42 are evenly distributed along the exterior circular periphery of the first cladding member 40. The radius of the cladding member 42 is 200  $\mu\text{m}$  and the radius of the concave portions 42 is 50  $\mu\text{m}$ . The distance between the core center and the curved boundary of each concave portion 42 is 90  $\mu\text{m}$ . The result shows a randomization efficiency of 93.7%.

**[0028]** Figures 4(a) and 4(b) illustrate a second embodiment of the present invention. In this embodiment, the cladding member 40 has a non-circular shape. Preferably, the cladding member 40 has such a polygon shape that such polygons, when they tile a plane surface, leave spaces between them. In other words, polygons having eight (8) or more sides 44 are used. Such polygon type cladding members 40 are close to a circular shape and therefore are advantageous to splicing.

**[0029]** In various preferred embodiments, cladding members 40 are in the form of eight (8), nine (9), ten (10) and eleven (11) sided polygons 44. In particular, cladding members 40 of nine (9) or ten (10) sided polygons 44 are found to have high randomization efficiency. Therefore, such cladding members 40 are capable of sufficiently scattering light in the cladding member 40 and yielding high clad-to-core energy transfer efficiencies. However, cladding members 40 having a polygon shape of more than twelve (12) sides tend to show reduced energy transfer efficiencies.

**[0030]** Figures 5(a) through 5(e) illustrate a third embodiment of the double clad fiber 10 of the present invention. The double clad fiber 10 comprises a center core member 20, a first cladding member 40 surrounding the center core member 20, and a second cladding member 60 surrounding the first cladding member 40. The first cladding member 40 further comprises a region 46 that has a modified refractive index ( $n_m$ ) differing from the rest of the first cladding member 40.

**[0031]** The refractive index  $n_m$  of the modified region 46 is preferably less than the refractive index  $n_c$  of the first cladding member 40. Alternatively, the refractive index  $n_m$  can also be greater than the refractive index  $n_c$ . When the refractive index  $n_m$  of the index modified region 46 is significantly greater than the refractive index  $n_c$  of the rest of the cladding member 40, it is preferred to reduce the size of the index modified region 46. A smaller index modified region 46 can minimize the amount of pump light captured in the index modified re-

gion 46 so that the energy will not be guided down the length of the fiber without reaching the core member 20.

**[0032]** In a preferred embodiment, the cladding member 40 has a circular shape in which light is scattered to ensure a high clad-to-core energy transfer. Accordingly, skew or helical mode light rays are perturbed by such index modified region 46 introduced in their path. When helical mode light rays encounter the index modified region 46, they are deflected. This scattering effect helps to redistribute the light by coupling the energy into non-helical modes, which effectively transfer energy to the core member 20.

**[0033]** The index modified region 46 can be obtained in different ways. The refractive index can be modified in a localized region by changing the composition in a doped region 47. Moreover, index modifications can be obtained by inducing stresses in the surrounding area of the region 47. In a preferred embodiment where the first cladding member 40 is made of silica glass, the index modified region 46 in the cladding member 40 can be obtained by doping with one or more of the following dopants: Ge, Al, P, B and F.

**[0034]** When sufficient amount of the dopants are used, the coefficient of thermal expansion of the doped region 47 can be made substantially different from that of the surrounding cladding member 40. This difference in coefficient of thermal expansion between the doped and undoped regions 47 and 40 in the cladding member 40 can create a significant stress field portion 48 in the cladding member 40. The stress field portion 48 can be scattered over a region larger than the doped region 47, when the fiber is drawn. This stress can substantially change the refractive index  $n_s$  in the affected region 48, which in turn helps in mode scattering and redistribution of the light rays.

**[0035]** In a preferred embodiment, the difference between the refractive index of the cladding member 40 and that of the stress field portion 48 ( $n_c - n_s$ ) is within such a range that the stress field portion 48 will not affect the polarization properties of the light traveling in the core member 20. Moreover, the resulting fiber 10 will have an enhanced strength. In another preferred embodiment, the difference between the refractive index of the cladding member and that of the stress field portion ( $n_c - n_s$ ) is less than  $10^{-4}$ , and more preferably  $10^{-5}$ .

**[0036]** Figures 5(a) through 5(e) shows various shapes, number and location of index modified regions 46 according to the third embodiment of the present invention. Figure 5(a) shows a preferred embodiment in which three index modified regions 46 are formed in the first cladding member 40. The index modified regions 46 are evenly distributed along the circular exterior periphery of the cladding member 40. More preferably, the index modified regions 46 are located away from the core member 20 and close to the exterior periphery of the cladding member 40. When so located, the index modified regions 46 can effectively perturb the skew mode light rays present at or near the exterior periphery

of the first cladding member 40 and therefore direct all light rays to the core member 20. In addition, the increased distance between the index modified regions 46 and the core member 20 can minimize the effect that the index modified regions 46 have on the polarization properties of the light traveling in the core member 20. In a preferred embodiment, the resulting randomization efficiency can be as high as 95.8%.

[0037] Figure 5(b) shows the index modified region 46 comprises doped regions 47. The doped regions 47 modify the local refractive index and further induce corresponding stress field portions 48. The shape, number and location of the doped regions 47 can vary similarly to those of the index modified regions 46 as shown in Figure 5(a) and discussed above.

[0038] Figures 5(c) and 5(d) show index modified regions 46 that have non-circular shapes and, more particularly, rectangular and shell shapes respectively. Figures 5(d) and 5(e) show cladding members 40 with index modified regions 46 that ensure maximum perturbation of the skew/helical mode light rays. Preferably, the index modified region/stress inducing members 46 are located away from the core member 20 and close to the exterior periphery of the cladding member 40 as discussed above.

[0039] The first cladding members 40 and the optical fibers 10 of the present invention can be used to prepare various double clad fiber lasers and amplifiers. The core, cladding and dopant compositions for making fibers 10 are described below. To fabricate the fiber 10, one composition from each of the groups of core member, first and second cladding members and dopants can be used.

#### (A) The Core Member

[0040] The core member 20 is composed of a transparent medium such as glass doped with one or more 4f-type rare earth element (atomic number 57-71). The rare earth elements are codoped with one or more index modifying elements such as Al, Ge, P, F and B. The following are some examples of core composition based on a silica glass host:

(1) Silica based core member doped with ytterbium, aluminum and phosphorus. The core is about 8  $\mu\text{m}$  (may range from 3-10  $\mu\text{m}$ ) in diameter and has a numerical aperture of 0.1 (may range from 0.07 to 0.25).

(2) Silica based core member doped with neodymium, aluminum and phosphorus. The core is about 6.5  $\mu\text{m}$  (may range from 3-10  $\mu\text{m}$ ) in diameter and has a numerical aperture of 0.1 (may range from 0.07 to 0.25).

(3) Silica based core member doped with erbium, ytterbium, germanium, aluminum and phosphorus.

The core is about 6  $\mu\text{m}$  (may range from 3-10  $\mu\text{m}$ ) in diameter and has a numerical aperture of 0.12 (may range from 0.07 to 0.25).

#### 5 (B) The First Cladding Member

[0041] The first cladding member 40 is of substantially pure material, such as transparent medium (glass or polymer). In the case of non-circular cladding member 40, the shape of the cladding member 40 is either a polygon of 8, 9, 10, 11 or 12 sides 44 or a round shape with one or more cut-out portions 42. In the case of a circular type cladding member 40, the composition of the cladding member 40 is non-uniform across the cross-section. More specifically, the cladding member 40 can have an index modified region 46.

#### (C) The Index Modified Region

[0042] The index modified regions 46 can be free air space or doped with one or more dopants. In a preferred embodiment where the cladding member 40 is made of a silica based glass, the dopant can be one or more of the elements of Ge, P, Al, B and F. The following are some examples of silica based compositions that can be used for the doped regions 47 in the cladding member 40:

(1) Air space or vacuum.

(2) Silica doped with Ge and B (or F). Doping levels are such that the index of the doped glass has a refractive index less than or equal to that of pure silica.

(3) Silica doped with Ge and/or P and/or Al. Doping levels are such that the index of the doped glass has a refractive index greater than that of pure silica.

(4) Silica doped with Ge, P and B (or F). Doping levels are such that the index of the doped glass has a refractive index less than or equal to that of pure silica.

[0043] Preferably, the dopants are present in silica based glass as oxides, such as  $\text{GeO}_2$ ,  $\text{P}_2\text{O}_5$ ,  $\text{B}_2\text{O}_3$  and  $\text{Al}_2\text{O}_3$ . More specifically, the dopants can be selected from one of the following compositions:

(1)  $\text{GeO}_2$  of the amount ranging from 1 to 3 mole %.

(2)  $\text{P}_2\text{O}_5$  of the amount ranging from 1 to 3 mole %.

(3)  $\text{B}_2\text{O}_3$  of the amount ranging from 1 to 4 mole %.

(4) F of the amount ranging from 0.2 to 1 mole %.

(5)  $\text{Al}_2\text{O}_3$  of the amount ranging from 0.5 to 3 mole %.

(6)  $\text{GeO}_2$  and F of the amount ranging from 0 to 5 mole % and from 0 to 1 mole % respectively.

(7)  $\text{GeO}_2$  and  $\text{B}_2\text{O}_3$  of the amount ranging from 0 to 5 mole % and from 0 to 4 mole % respectively.

(8)  $\text{P}_2\text{O}_5$  and F of the amount ranging from 0 to 5 mole % and from 0 to 1 mole % respectively.

(9)  $\text{P}_2\text{O}_5$  and  $\text{B}_2\text{O}_3$  of the amount ranging from 0 to 5 mole % and from 0 to 4 mole % respectively.

(10)  $\text{Al}_2\text{O}_3$  and F of the amount ranging from 0 to 3 mole % and from 0 to 1 mole % respectively.

(11)  $\text{Al}_2\text{O}_3$  and  $\text{B}_2\text{O}_3$  of the amount ranging from 0 to 3 mole % and from 0 to 4 mole % respectively.

(12)  $\text{GeO}_2$ ,  $\text{P}_2\text{O}_5$  and F of the amount ranging from 0 to 3 mole %, from 0 to 3 mole % and from 0 to 1 mole % respectively.

(13)  $\text{GeO}_2$ ,  $\text{P}_2\text{O}_5$  and  $\text{B}_2\text{O}_3$  of the amount ranging from 0 to 3 mole %, from 0 to 3 mole % and from 0 to 4 mole % respectively.

#### (D) The Second Cladding Member

**[0044]** The second cladding member 60 is provided to help to guide the pump light in the first cladding member 40. The second cladding member 60 can be made of either a glass or polymer and has a lower refractive index than that of the first cladding member 40. When the second cladding member 60 is made of glass, dopants can be added to the second cladding member 60 to reduce its refractive index so that the doped glass has a lower refractive index than that of the first cladding member 40. In a preferred embodiment, the second cladding member 60 can be a doped glass such as borosilicate glass or fluorinated silica glass. In another preferred embodiment, the second cladding member 60 is made of a low index polymer, more preferably a fluorinated polymer.

**[0045]** The foregoing description of preferred embodiments of the present invention has been provided for the purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise forms disclosed. Obviously, many modifications and variations will be apparent to practitioners skilled in this art. The embodiments were chosen and described in order to best explain the principles of the invention and its practical application, thereby enabling others skilled in the art to understand the invention for various embodiments and with various modifications as are suited to the particular use contemplated. It is intended that

the scope of the invention be defined by the following claims.

#### 5 **Claims**

1. An optical fiber for use in fiber lasers and amplifiers, comprising:

a core member;

a cladding member surrounding the core member for receiving pump energy and transferring the pump energy to the core member, the cladding member being substantially circular in its cross-section and having a predetermined refractive index ( $n_c$ ), the cladding member comprising an index modified region for directing light to the core member, the index modified region comprising a stress field portion having a predetermined refractive index ( $n_s$ ); and

an outer layer surrounding the cladding member,

wherein the difference between the refractive index of the cladding member and that of the stress field portion ( $n_c - n_s$ ) is within such a range that the stress field portion does not affect the polarization properties of the light traveling in the core.

2. An optical fiber of claim 1 wherein the modified index region contains a dopant selected from the group consisting of Ge, Al, P, B and F.

3. An optical fiber of claim 1 wherein the modified index region contains Ge and Al.

4. An optical fiber of claim 1 wherein the modified index region contains Ge and P.

5. An optical fiber of claim 1 wherein the modified index region contains Ge and B.

6. An optical fiber of claim 1 wherein the modified index region contains Ge and F.

7. An optical fiber of claim 1 wherein the modified index region contains P and Al.

8. An optical fiber of claim 1 wherein the modified index region contains Ge, P and Al.

9. An optical fiber of claim 1 wherein the modified index region contains Ge, P and B.

10. An optical fiber of claim 1 wherein the modified index region contains Ge, P and F.

11. An optical fiber of claim 1 wherein the modified index region is a free air space. 5
12. An optical fiber of claim 1 wherein the difference between the refractive index of the cladding member and that of the stress field portion ( $n_c - n_s$ ) is less than  $10^{-4}$ . 10
13. An optical fiber of claim 1 wherein the difference between the refractive index of the cladding member and that of the stress field portion ( $n_c - n_s$ ) is less than  $10^{-5}$ . 15
14. A clad article used in optical fibers for receiving pump energy and transferring the pump energy to a core member comprising: 20
- a core member, and
- a cladding member surrounding the core member and having a polygon shape of at least eight sides. 25
15. A clad article of claim 14 wherein the polygon is a decahedron. 30
16. A clad article of claim 15 wherein the polygon shape has eleven sides. 35
17. A clad article of claim 15 wherein the polygon shape has twelve sides. 40
18. A clad article used in optical fibers for receiving pump energy and transferring the pump energy to a core member comprising: 45
- a core member,
- a first cladding member surrounding the core member and having a substantially circular exterior periphery, the first cladding member comprising a cut-out portion that extends from the exterior periphery and terminates with a curved boundary in the first cladding member; and 50
- a second cladding member surrounding the first cladding member, 55
- wherein the second cladding member have an interior periphery complementary to the exterior periphery of the first cladding member. 60
19. A cladding article of claim 18, wherein the curved boundary of the cut-out portion is concave in relation to the circular exterior periphery. 65
20. A cladding article of claim 19, wherein the first cladding member has three cut-out portions evenly distributed along its circular exterior periphery. 70

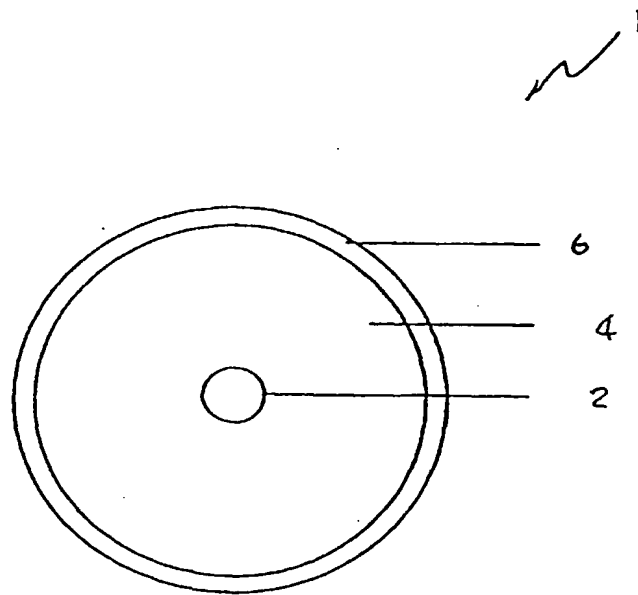


Figure 1  
(Prior Art)



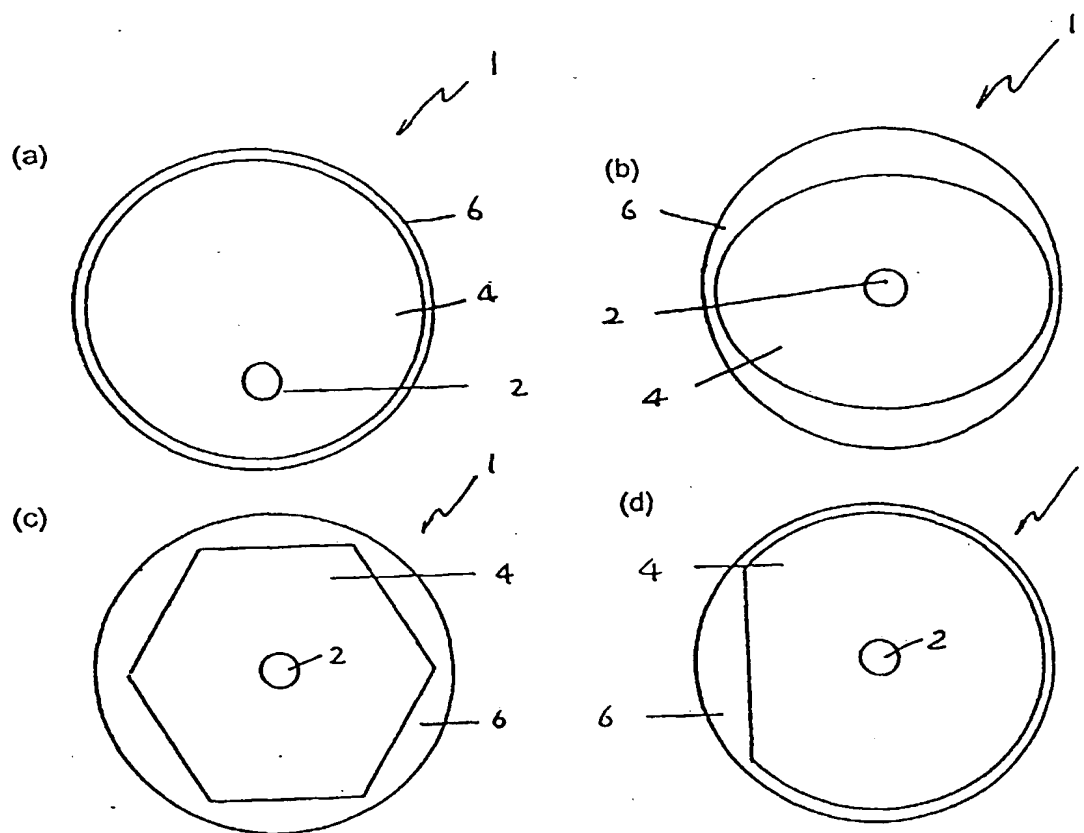


Figure 2

(Prior Art)

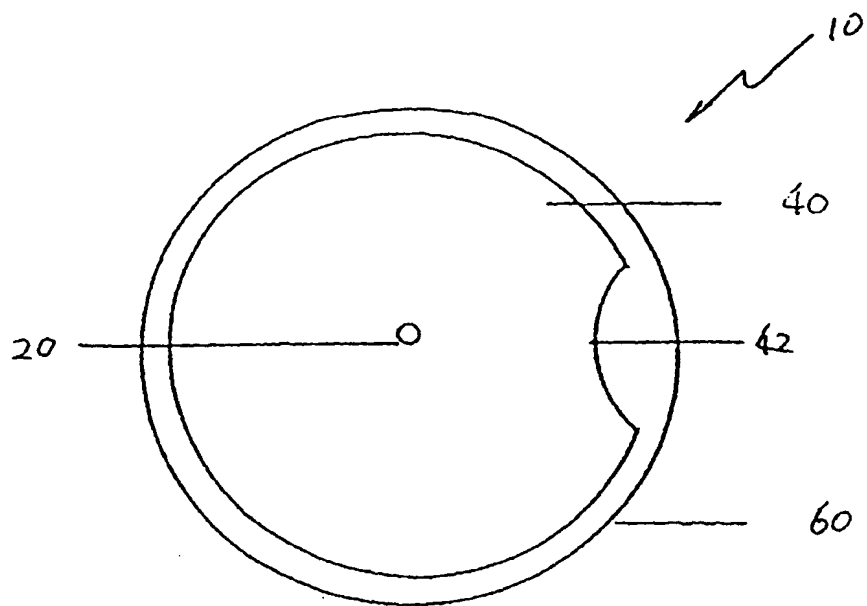


Fig. 3(a)

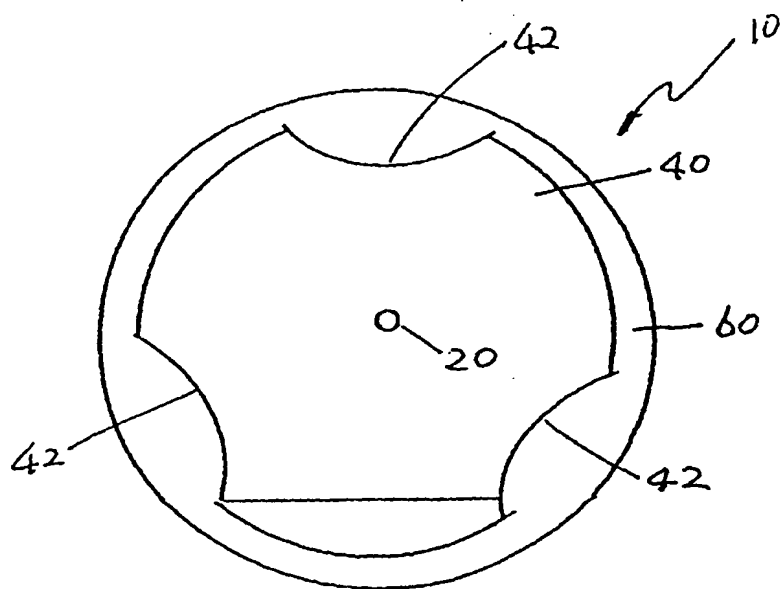


Fig. 3(b)

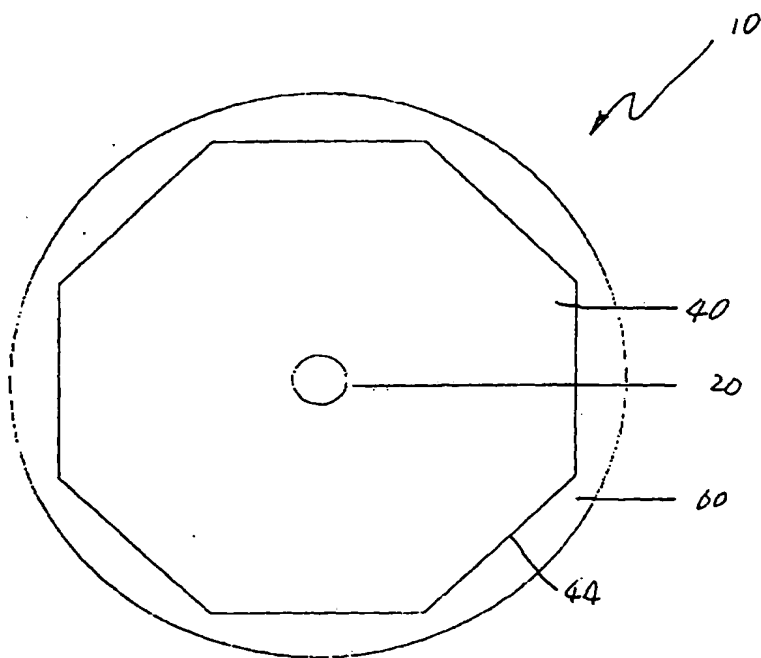


Fig. 4(a)

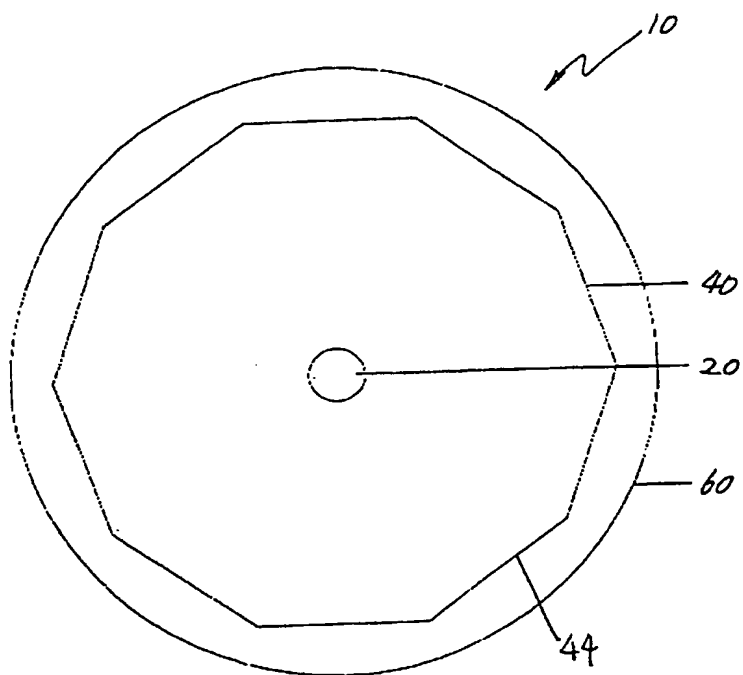


Fig. 4(b)

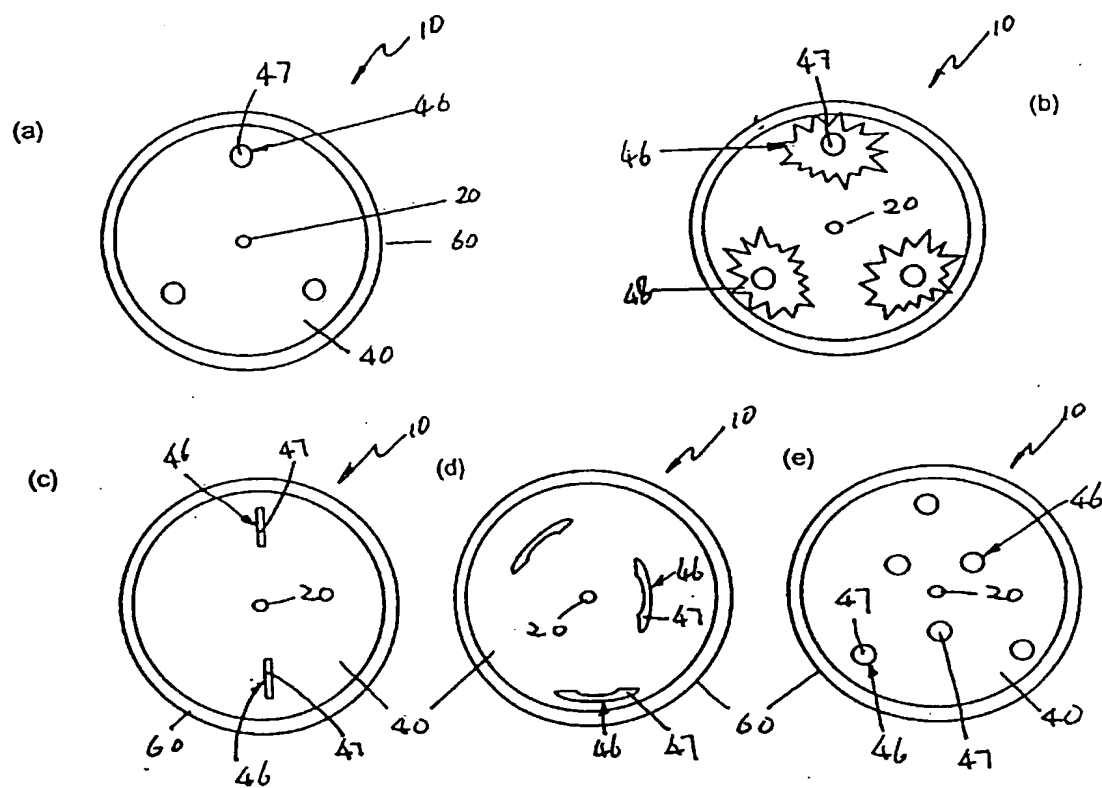


Fig. 5



(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
**21.01.2004 Bulletin 2004/04**

(51) Int Cl.7: **H01S 3/067**

(43) Date of publication A2:  
**11.10.2000 Bulletin 2000/41**

(21) Application number: **00302938.6**

(22) Date of filing: **07.04.2000**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE**  
 Designated Extension States:  
**AL LT LV MK RO SI**

- Prohaska, John D.  
 Millbury, Massachusetts, 01527 (US)
- Smith, Malcom  
 Charlton, Massachusetts, 01507 (US)
- Tankala, Kanishka  
 Sturbridge, Massachusetts, 01550 (US)

(30) Priority: **09.04.1999 US 128487 P**  
**31.03.2000 US 541040 P**


(71) Applicant: **LUCENT TECHNOLOGIES INC.**  
**Murray Hill, New Jersey 07974-0636 (US)**

(74) Representative: **Schoppe, Fritz, Dipl.-Ing. et al**  
**Patentanwälte Schoppe, Zimmermann,**  
**Stöckeler & Zinkler,**  
**Postfach 246**  
**82043 Pullach bei München (DE)**

(72) Inventors:  
 • **Mazzarese, David J.**  
**Warren, Massachusetts 01803 (US)**

(54) **Cladding member for optical fibers and optical fibers formed with the cladding member**

(57) The present invention provides an optical fiber for use in fiber lasers and amplifiers wherein the optical fiber has a core member surrounded by a cladding member for receiving pump energy and transferring the pump energy to the core member. The optical fiber also has an outer layer surrounding the cladding member. The cladding member has a circular exterior periphery and a predetermined refractive index ( $n_c$ ). The cladding member has an index modified region that directs light to the core member. The index modified region has a stress field portion with a predetermined refractive index ( $n_s$ ). The difference between the refractive index of the cladding member and that of the stress field portion ( $n_c - n_s$ ) is within such a range that the stress field portion does not affect the polarization properties of the light traveling in the core. Preferably, the difference between the refractive index of the cladding member and that of the stress field portion ( $n_c - n_s$ ) is less than  $10^{-4}$ , and more preferably  $10^{-5}$ .

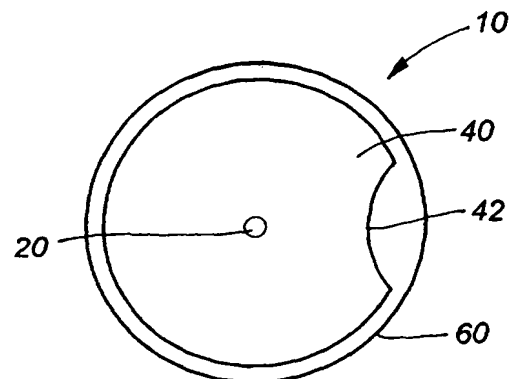

**FIG.3a**



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 30 2938

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
P,X	EP 0 918 382 A (LUCENT TECHNOLOGIES INC) 26 May 1999 (1999-05-26) * abstract *	1	H01S3/067
A	US 5 802 236 A (DIGIOVANNI DAVID JOHN ET AL) 1 September 1998 (1998-09-01) * abstract *	1	
A	EP 0 776 074 A (AT & T CORP) 28 May 1997 (1997-05-28) * figure 1 *	1	
A	US 5 873 923 A (DIGIOVANNI DAVID JOHN) 23 February 1999 (1999-02-23) * figure 1 *	1	
A	EP 0 637 762 A (FUJIKURA LTD) 8 February 1995 (1995-02-08) * page 3, lines 3-5; figures 19-22 *	1	
<p><del>The present search report has been drawn up for all claims</del></p>			<p>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</p> <p>H01S</p>
Place of search		Date of completion of the search	Examiner
The Hague		4 August 2003	Galanti, M.
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04/01)



European Patent  
Office

Application Number

EP 00 30 2938

### CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

### LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☒ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:

1-13





European Patent  
Office

LACK OF UNITY OF INVENTION  
SHEET B

Application Number  
EP 00 30 2938

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. claims: 1-13

A cladding pumped fiber where the cladding member comprises an index modified region having a stress field portion with a predetermined refractive index.  
---

2. claims: 14-17

A cladding pumped fiber where the cladding member has at least and eight sides polygon shape.  
---

3. claims: 18-20

A cladding pumped fiber where the cladding member has a curved boundary cut out portion.  
---

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 2938

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

04-08-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0918382	A	26-05-1999	US	5949941 A	07-09-1999
			EP	0918382 A2	26-05-1999
			JP	11223734 A	17-08-1999
-----					
US 5802236	A	01-09-1998	DE	69707201 D1	15-11-2001
			DE	69707201 T2	06-06-2002
			EP	0810453 A1	03-12-1997
			JP	3306847 B2	24-07-2002
			JP	10095628 A	14-04-1998
-----					
EP 0776074	A	28-05-1997	DE	69604042 D1	07-10-1999
			DE	69604042 T2	13-04-2000
			EP	0776074 A2	28-05-1997
			JP	3298799 B2	08-07-2002
			JP	9194225 A	29-07-1997
			US	5966491 A	12-10-1999
			US	5873923 A	23-02-1999
-----					
US 5873923	A	23-02-1999	DE	69604042 D1	07-10-1999
			DE	69604042 T2	13-04-2000
			EP	0776074 A2	28-05-1997
			JP	3298799 B2	08-07-2002
			JP	9194225 A	29-07-1997
			US	5966491 A	12-10-1999
-----					
EP 0637762	A	08-02-1995	DE	69424606 D1	29-06-2000
			DE	69424606 T2	25-01-2001
			EP	0637762 A1	08-02-1995
			US	5689578 A	18-11-1997
			WO	9419714 A1	01-09-1994
-----					

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**